
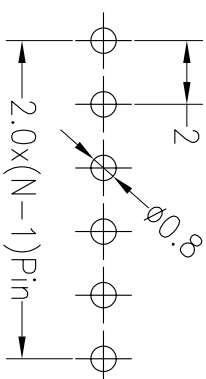


## SPECIFICATIONS

Rated Current: 1.5AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C



Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PA6T  
 Max. Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

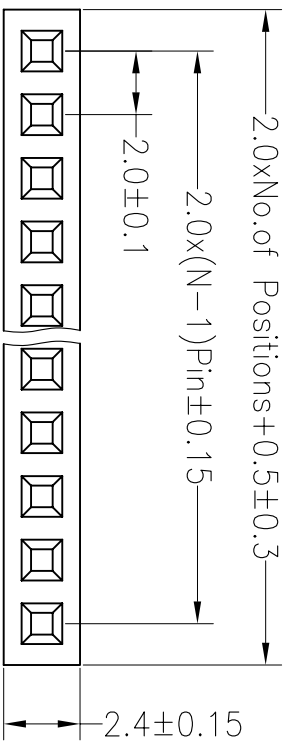

## Ordering Information

2343 01 XX X N XX S U X 01

No. of Pins Per Row: 1+2~1+40  
 Insulator Material Option:  
 A=BK-PBT  
 B=BK-PA66  
 C=BK-PA6T  
 D=BK-PA46  
 F=BK-LCP  
 Contact Plating:  
 G0:Gold Flash  
 G2:5U" Gold  
 G3:10U" Gold  
 G4:15U" Gold  
 G5:30U" Gold  
 S0:Gold Flash/Tin  
 SN:Tin  
 Packing:  
 A=Troy  
 T=Tube  
 P=Tube+Cap  
 R=Reel+Cap  
 M=Reel+Wylar

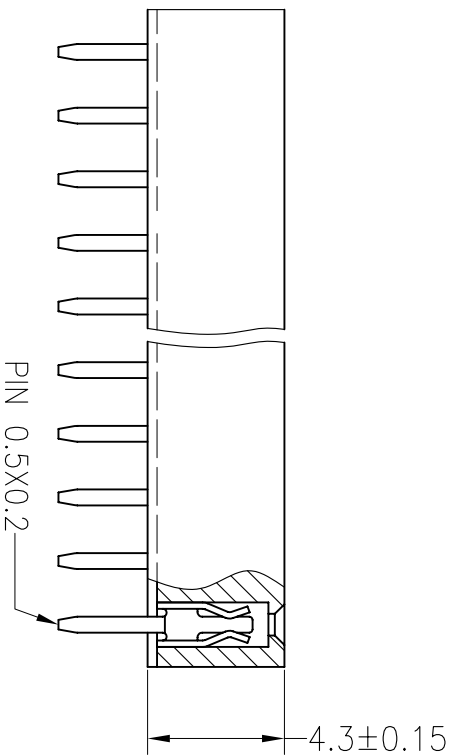

OPERATION		DRAW		SCALE		FIT	
X.X	±0.30	YUSheng	12.04.18	UNIT	mm	mm	A4
X.XX	±0.20	CHECK		SIZE	A4	SHEET	1/1
X.XXX	±0.10	APPROVE		PROJ.			
Angle	±3°						
DIM	TOL						

**JIN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.04.18	NEW DRAWING	
1			

PART NO.	234301XXXXXSUX01
TITLE:	2.00PF H4.30mm 1xNpin 180°