





FILE NO: E382810

SPECIFICATIONS

Rated Current: 1.5AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C



Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

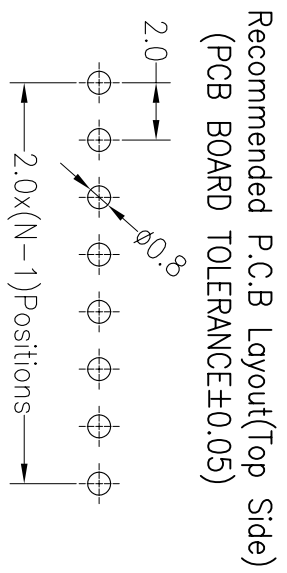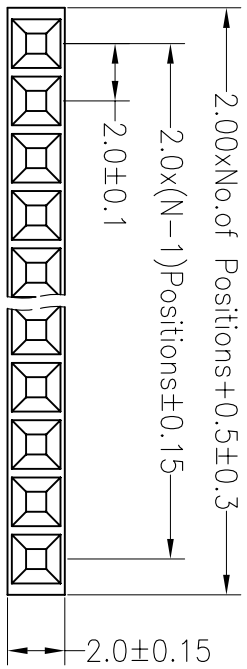

Ordering Information

2365 01 XX X N XX S Y X 01

No. of Pins Per Row: 1x2~1x40
 Insulator Material Option:
 A=BK-PBT
 B=BK-PA66
 C=BK-PA6T
 D=BK-PA46
 F=BK-LCP
 Contact Plating:
 G0: Gold Flash
 G2: 5U" Gold
 G3: 10U" Gold
 G4: 15U" Gold
 G5: 30U" Gold
 S0: Gold Flash/Tin
 SN: Tin
 Packing:
 0=Pe Bag
 A=Troy
 T=Tube
 P=Tube+Cap

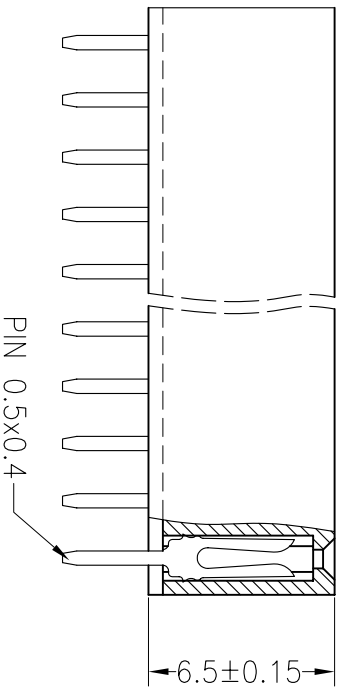

A	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	BEN	14.07.10	SCALE		FIT	PART NO.	TITLE:
	1	2014.07.10	NEW DRAWING						X.X	±0.30			
B					X.XX	±0.20	CHECK			PROJ.			
					X.XXX	±0.10	APPROVE						
C					Angle	±3°							
D					DIM	TOL							
E													
F													
G													

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992