

HSE ROHS

MATERIAL&FINISH

Insulator: PBT Glass Fiber (UL94V-0)

Contact : **Phosphor Bronze**

Contact : Gold-Plated Over Nickel.

SPECIFICATIONS

Current Rating : 1A AC, DC

Voltage Rating : 250V AC, DC

Temperature Range: -40° C To +105° C

Contact Resistance: 20mΩ Min

Insulation Resistance: 1000MΩ Min




Withstanding Voltage: 500V AC/Min

PIN NO.	A	B
10P	10.16	22.03
14P	15.24	27.10
16P	17.78	29.60
20P	22.86	34.80
26P	30.48	42.40
34P	40.64	52.60
40P	48.26	60.22
50P	60.96	72.90
60P	73.66	85.43
64P	78.74	90.51

Ordering Information

5481 XX P S0 B N 01

No. of Pins 10~64P
SO:Gold Flash/NI

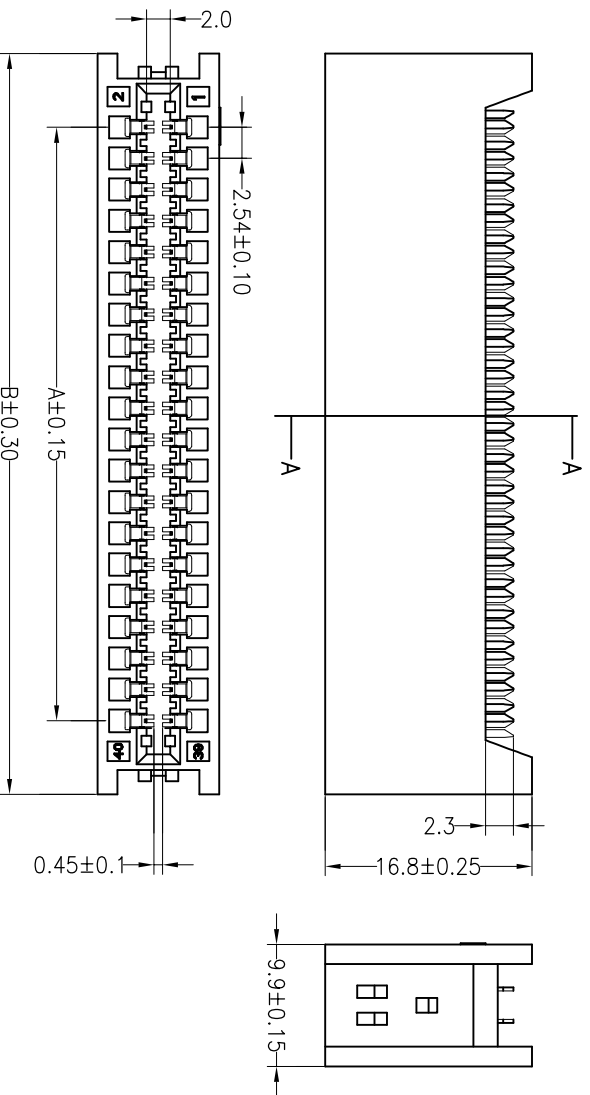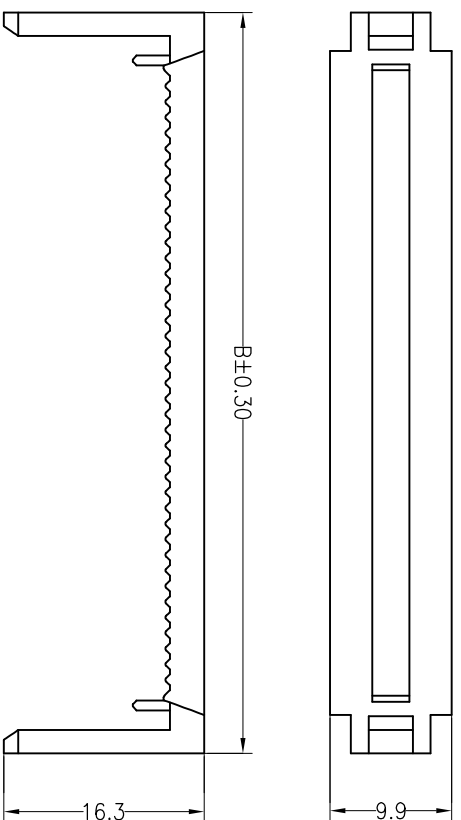

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	OPERATION	DRAW	YUuSheng	19.05.12	SCALE	FIT	SHEET	PROJ.	PART NO.	TITLE:
A0	2019.05.12	NEW DRAWING		X:XXX	±0.10	CHECK	X:XX	±0.20			mm	A4	1/1		5481-XXPS0BND01	2.54 OE Connector
1				Angle	±3°		X:XX	±0.30								

JILIN 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONIC CO.,LTD
Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892