
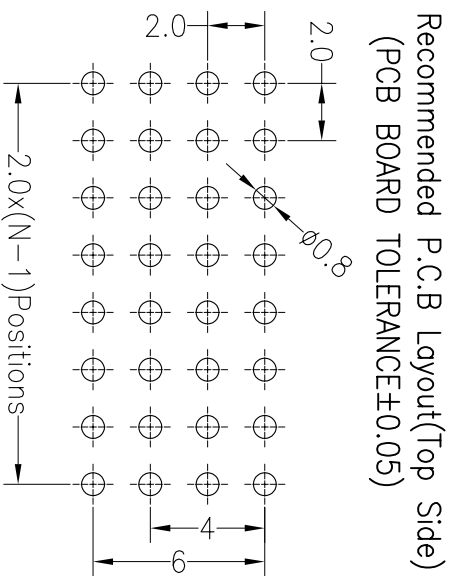


SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)

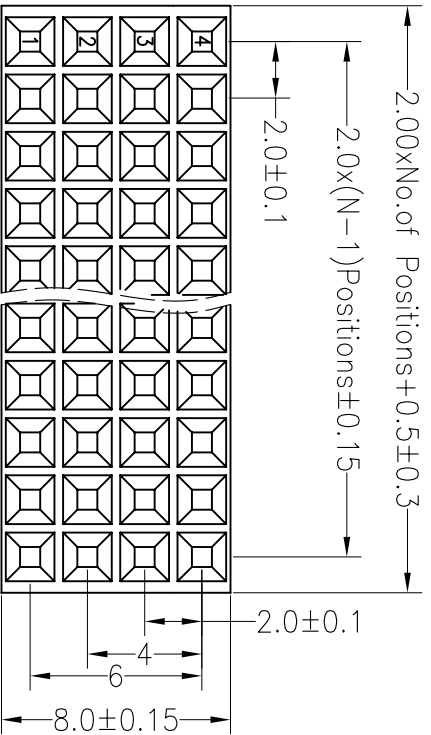



Ordering Information

2363 04 XX X N XX SY X 01

No. of Pins Per Row 4x1~4x40
 Insulator Material Option
 A=BK-PBT
 B=BK-PA66
 C=BK-PA6T
 D=BK-PA46
 F=BK-LCP

Contact Plating
 G0:Gold Flash
 G1:3U" Gold
 G2:5U" Gold
 G3:10U" Gold
 G4:15U" Gold
 G5:30U" Gold
 S0:Gold Flash/Tin
 SN:tin

Packing
 0=PE Bag
 A=Tray
 T=Tube
 P=Tube+Cap
 R=Reel+Cap
 M=Reel+Mylar

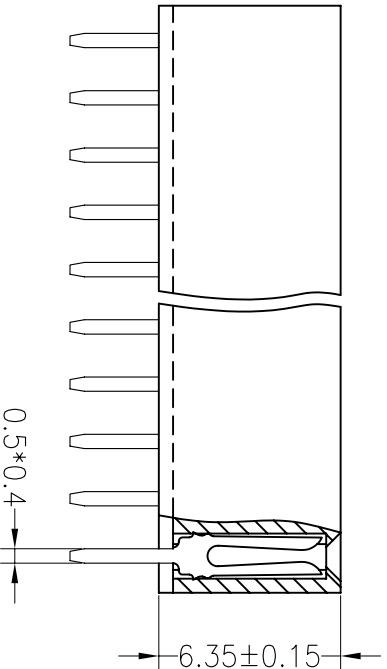

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

A

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	Y/YuSheng	12.04.18	SCALE		FIT	PART NO.	TITLE:
				X.X	±0.30				UNIT	mm			
A0	2012.04.18	NEW DRAWING		X.XX	±0.20	CHECK			SIZE	A4	1/1	236304XXXXXXSYX01	2.00PF H6.35mm 4xNpin 180°
				Angle	±3°	APPROVE			SHEET	1/1			
				DIM	TOL				PROJ.				

1

2

3

4

5

6

7

8

9

1

2

3

4

5

6

7

8

9

G

F

E

D

C

B

A